

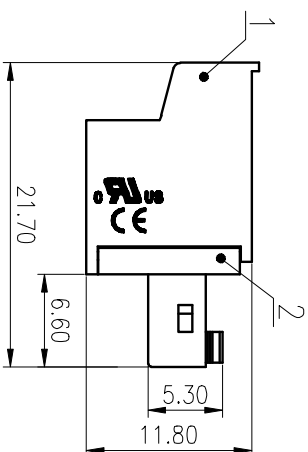
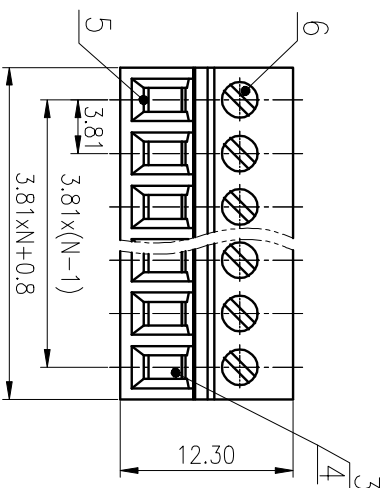


公差等级/General	Tolerances(mm)										公差等级/General		
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.250	>.315	>.400	0.1/1.0
3	~	~	~	~	~	~	~	~	~	~	~	~	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

2P-6P have the salient,  
7P-24P have not the salient



6	Screw1	Steel	M2/Zn Plated
5	Cage	Steel	M2/Zn Plated
4	Block	Steel	Zn Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	160/8	/
额定脉冲电压/Rate Impulse Voltage(KV)	/	2.5	/
额定扭矩/Torque Tightening(N.m/Lb.in)	M2, 0.2/1.77		
绞合范围/硬线和软线/Wire Range(rigid and flexible)(mm²/AWG)	1.5/30~16		
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL:

SURFACE:

MAT NO.: /  
STATUS: /

NINGBO DEGSON ELECTRICAL CO., LTD

APPD: Lon CHH 2020.06.10  
CHKD: Yu JZh 2020.06.10

NAME: 15EDGKC-3.81-XXP-1Y-00A(H)

DRAFT: Li Zh 2020.06.10

DRAWING NO.: 10002259

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION

DRAFT DATE

SIZE: A4

SCALE: 2:1

REV TO SHEET 1/1

D

C

B

A

1

2

3

4

5

6