
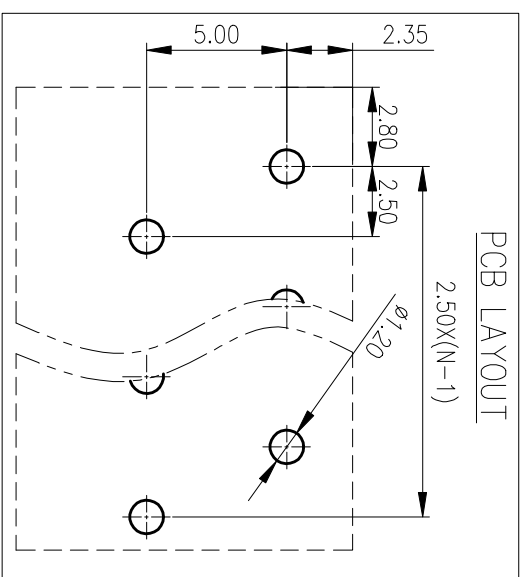
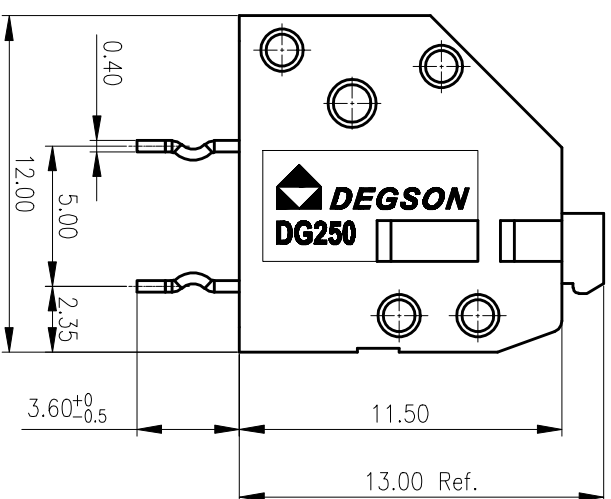


公差等级/General	Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50				

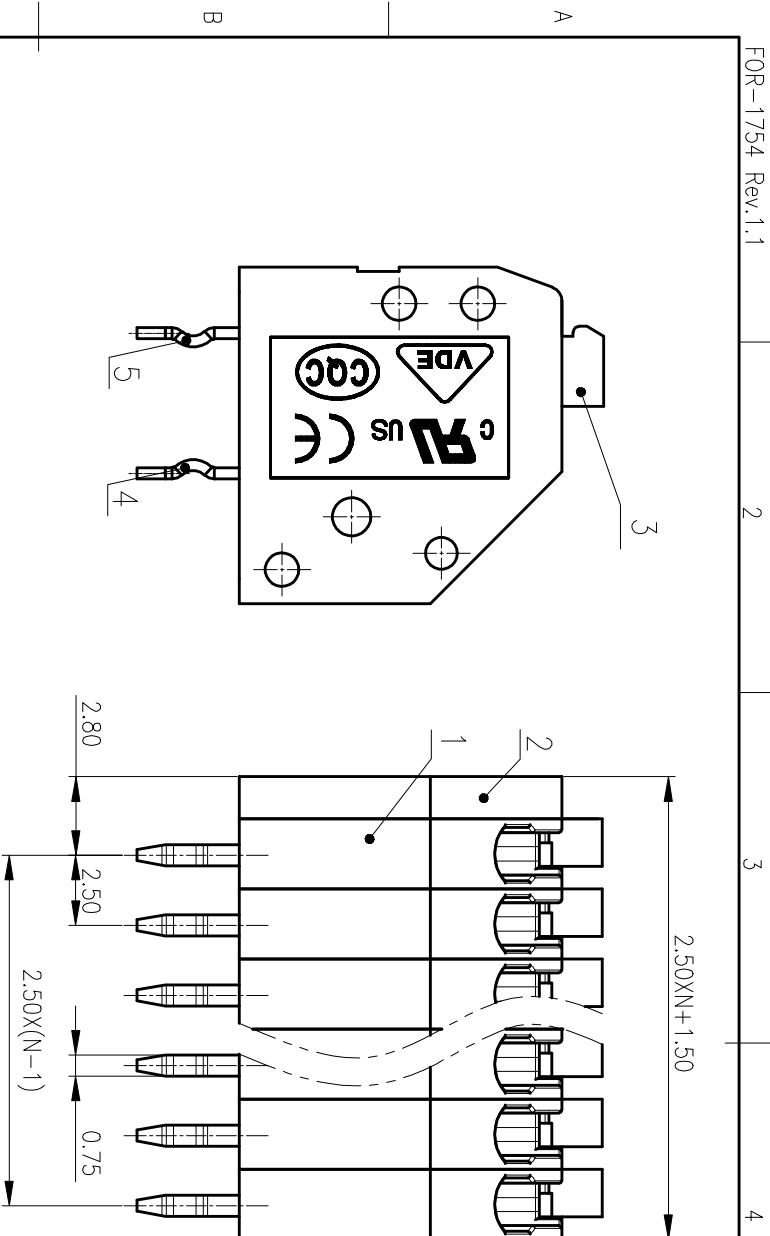

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Button	PA66	UL94V-0
4	Small Pin header	Copper Alloy	Sn plated
5	Big Pin header	Copper Alloy	Sn plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	LIGL 2020.06.19	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD:	MeK 2020.06.19	DRAWING NO.:	DG250-2.5-XXP-1Y-00A(H)
DRT:	YYC 2017.09.02	TYPE:	CUSTOMER DRAWING
SIZE:	A4	SCALE:	4:1
	(mm)		SHEET
	(inch)		1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/2	300/2	300/2
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	/	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/2	/
工频耐压/Withstanding voltage(V/1Min)	/	AC2000	/
线径范围(裸线铜线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~0.5/24~20		
间距/Pitch(mm)/线径范围/Poles	2.5/N=01~24P		
剥线长度/Stripping length(mm)	8.5~9.5		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		