
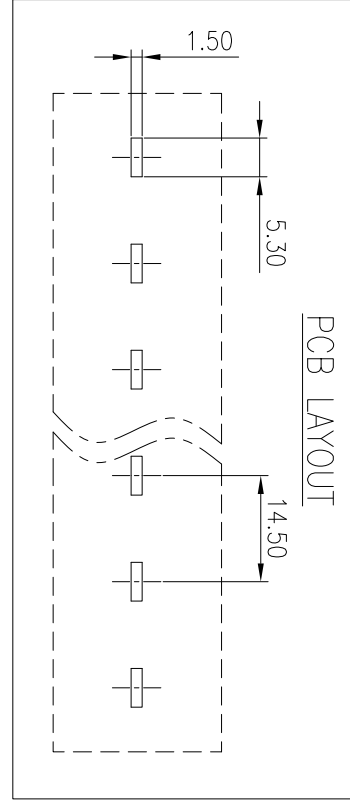
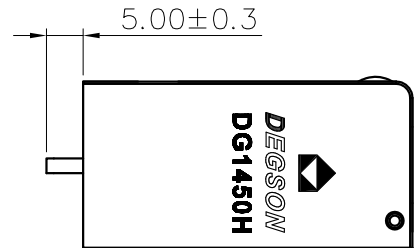
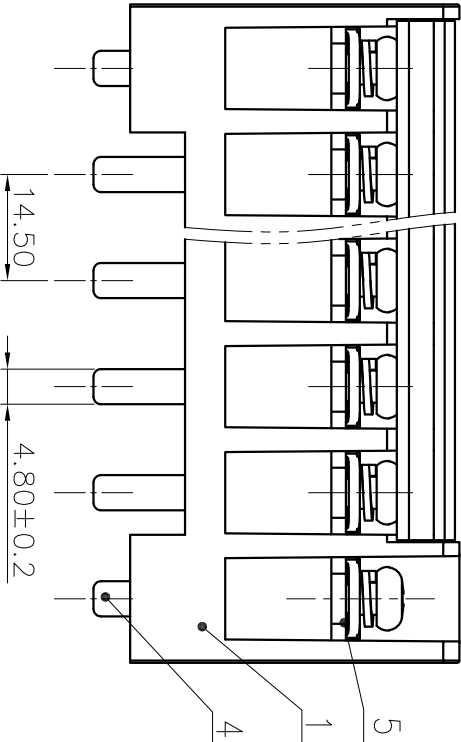
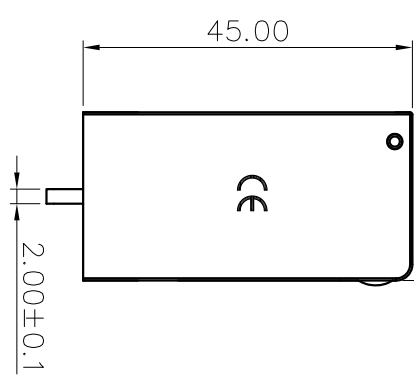


未注公差/General tolerances(mm)		0.1/10
0	>3	~
~	>6	~
~	>10	~
~	>18	~
~	>30	~
~	>50	~
~	>80	~
~	>120	~
~	>180	~
~	>250	~
~	>315	~
~	>400	~
~	>500	~
~	>500	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.57	±0.57
±0.80	±0.93	±1.05
±1.15	±1.60	±2.20
±2.50		
		±Z

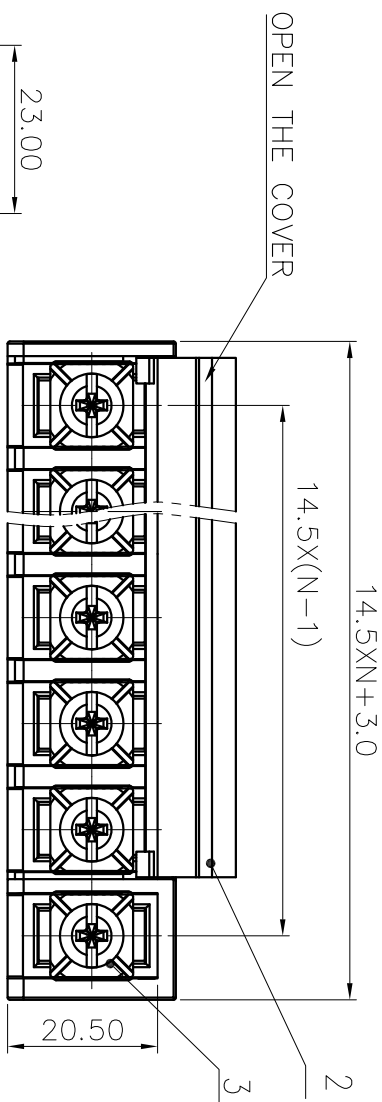

5	Nut	Steel	Zn Plated
4	Pin header	Copper alloy	Sn Plated
3	Screw	Steel	Zn Plated
2	Cover	PC	UL94V-2
1	Housing	PBT	UL94V-0

UL 标准/UL Standard: B C D

额定电压/电流/Rated Voltage(V)/Current(A): 600/57 600/57 /

EC 标准/EC Standard: /

过压类别/Overvoltage Category/污染等级: III/3 III/2 II/2

级/Pollution Degree: /

额定电压/电流/Rated Voltage(V)/Current(A): 800/57 1000/57 1000/57

扭矩/扭力/Torque Tightening(N·m/Lb·in): M5: 2.3/20

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm<sup>2</sup>/AWG): 0.5-10/22-8

可焊/Pitch(mm)/线径范围/Poles: 14.5/N=03~14P

剥线长度/Stripping length(mm): 13

使用温度范围/Operating temperature(°C): -40~+120

符合RoHS环保要求/Conform to RoHS: Yes

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG1450H-C07

TYPE: CUSTOMER DRAWING

SCALE: 1:1

SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE