


Pitch Range In mm	Nominal Dimension Range In mm					- 0.1/10 /	
	Over 6	Over 10	Over 10	Over 30	Over 60		
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	≤	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70		
					±1.00	±1.30	±2

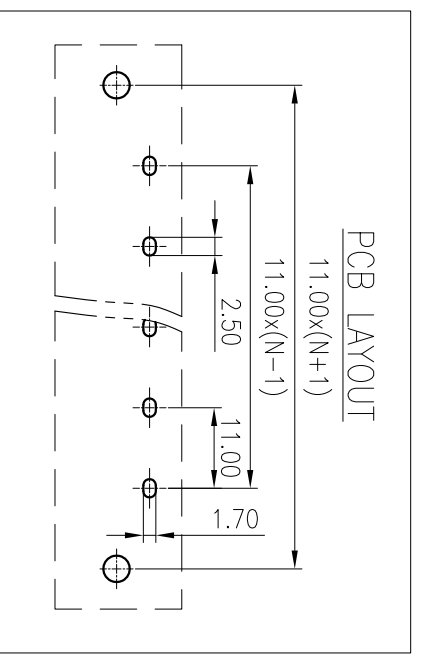

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/30 300/30 300/10			
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等 III/3 III/2 II/2			
级/ Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A) 300/32 300/32 600/32			
额定脉冲电压(kV)/Rate Impulse Voltage(kV) 4 4 4			
额定扭矩/Torque Tightening(N·m/Lb·in) M4, 1.2/10.53			
线芯范围(截线)/Wire Range(flexible)(AWG) 22~10			
可焊/Pitch(mm)/线数范围/Poles 11.00/N=02~20P			
剥线长度/Stripping length(mm) 12			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			
MATERIAL: SURFACE: /			

NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:	DG65S-A-XXP-1Y-00A(H)		
CHKD:	DRAWING NO.: DG65S-C03		
DRFT:	WU NK	2020.05.29	TYPE: CUSTOMER DRAWING
SIZE: A4	mm	(inch)	SCALE: 1:1
REV	ECN	DESCRIPTION	DRFT
DATE			
REV	ECN	DESCRIPTION	DRFT
DATE			