
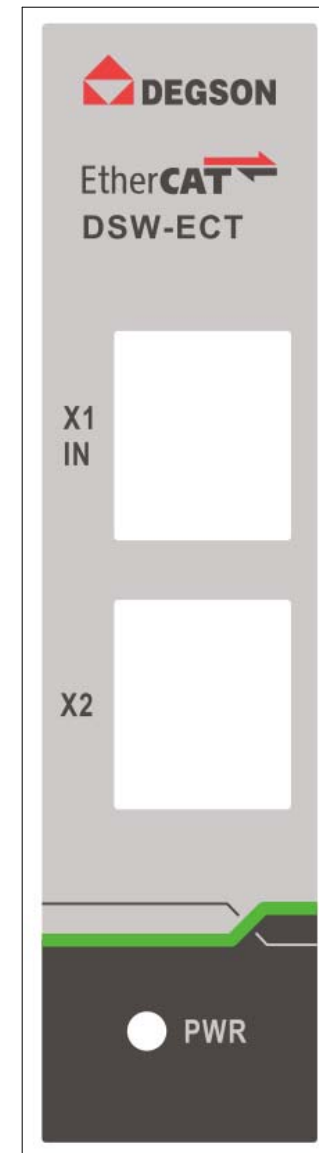
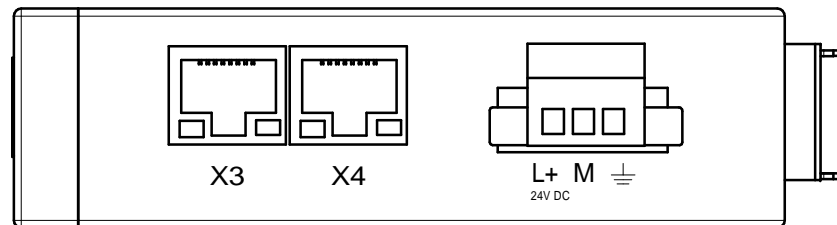
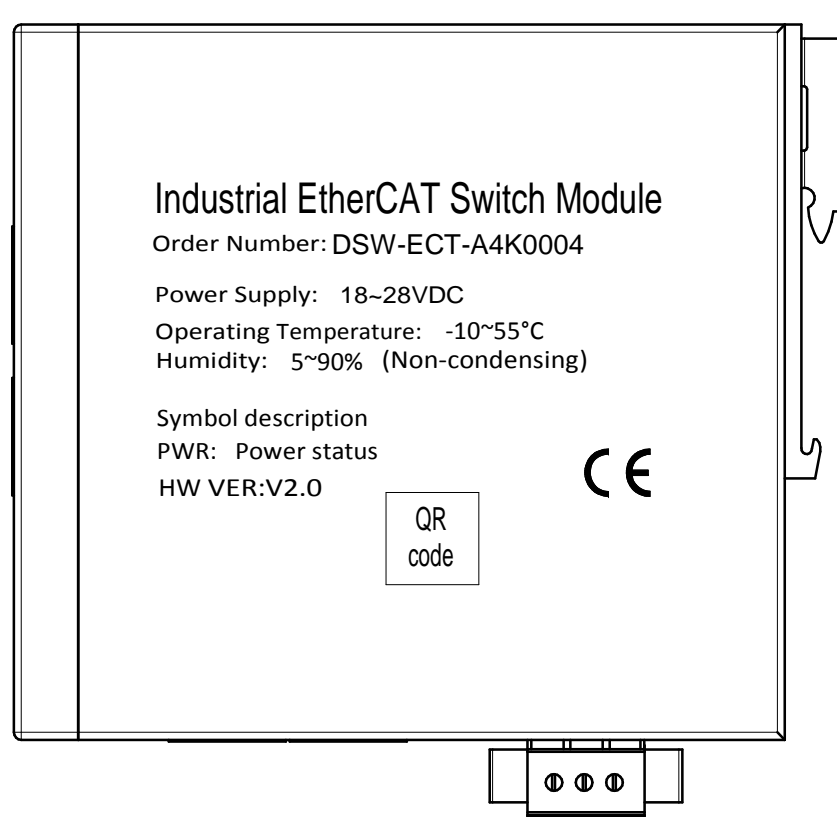
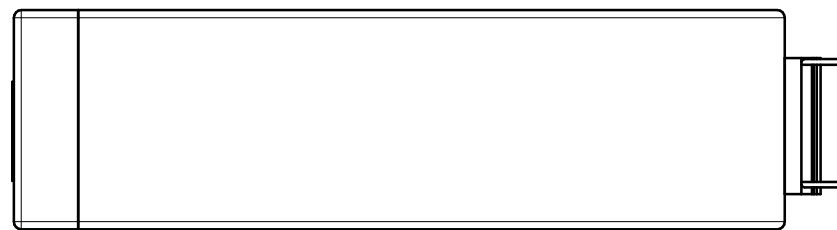
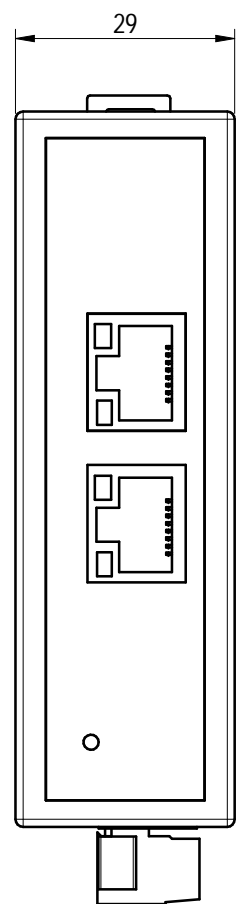


未注公差/General tolerances (mm)														
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2'	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

通讯协议 /Communication Protocol	EtherCAT
端口数 Port number	4*RJ45
传输速率/Transmission rate	10/100Mbps
安装方式/Installation mode	DIN35mm
包装规范/Packaging specification	/

印字为激光打标, 印字内容清晰、无断线等/Printing for laser

marking,printing content is clear ,no broken line,ect

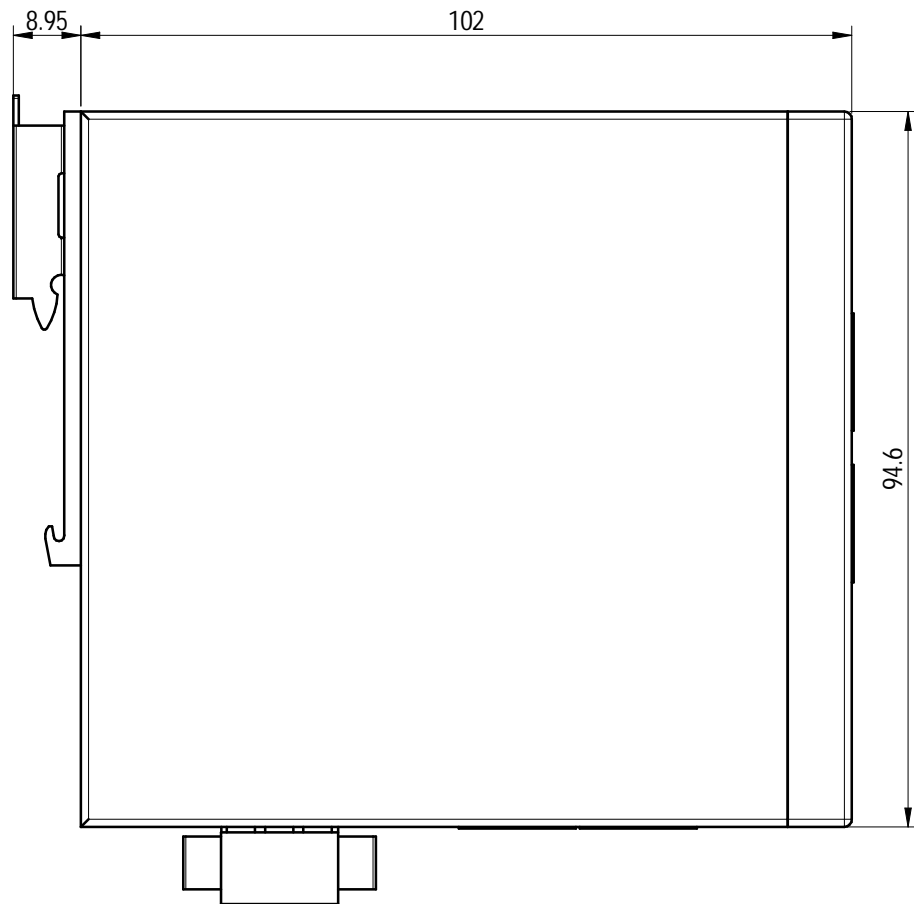

顶部贴牌模版
Top sticker template:

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent.

00		The first release	GXJ	2024.08.02						
REV	ECN	DESCRIPTION	DRFT	DATE	④	A3	200289844	CUSTOMER DRAWING	work	1:1

DEGSON		MATERIAL:	SURFACE/COLOR:
APPD: LGL	2024.08.02	MAT NO./REV: 30090000049-1 / 00	MAT STATUS: work
CHKD: MEK	2024.08.02	NAME	
DRFT: GXJ	2024.08.02	DSW-ECT-A4K0004	
DRAWING NO.	TYPE	DRAWING STATUS	SCALE
200289844	CUSTOMER DRAWING	work	1:1
SHEET	1/1		